



SAB 6922


Safety threaded socket

Ø 4mm Safety

1.000 V CAT III

32 A

- for fixture in panels up to 6 mm thick
- hole Ø 12.1 mm

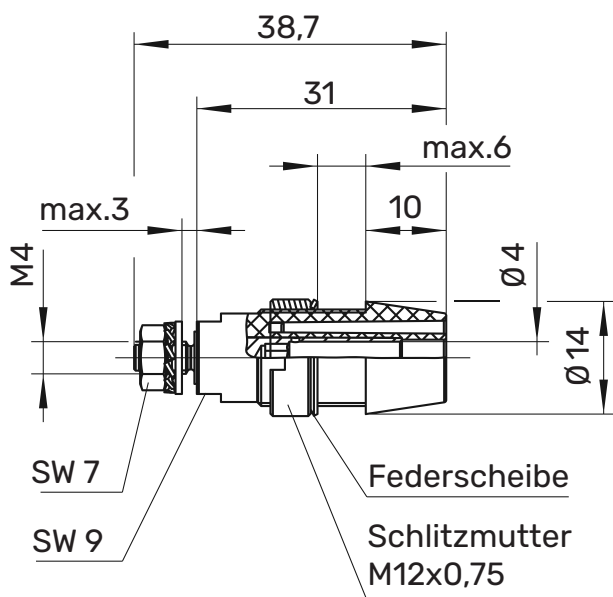

! WH 005



MA 007



General information

Order No. ¹⁾	SAB 6922 Ni Au / ..(colour)
colours	black, red, blue, yellow, green, grey, brown, white, purple, green-yellow
contact parts	nickel-plated gold-plated
insulation	PA6.6 (UL94-V2)

Technical data

terminal	M4
transition resistance	7 mΩ (Ni) 5 mΩ (Au)
rated voltage ²⁾	1000 V CAT III
rated current ²⁾	32 A
operating temperature	from -25 °C to +80 °C
max. torque	45 Ncm
fastening nut	

¹⁾ other contact platings, colours and terminals on request
²⁾ at normal ambient temperatures

SAB 6922

Ni

Au

	SW	Schwarz	Black	99014109	99014096
	RT	Rot	Red	99014110	99013845
	BL	Blau	Blue	99014111	99014097
	GE	Gelb	Yellow	99014112	99014098
	GN	Grün	Green	99014113	99014099
	GR	Grau	Grey	99014114	99013797
	BR	Braun	Brown	99016186	99016183
	WS	Weiß	White	99016187	99015168
	VI	Violett	Purple	99014115	99013798
	GNGE	Grüngelb	green-yellow	99015133	99015132