



SEB 7077


Safety threaded socket

Ø 4mm Safety

1000 V CAT III

24 A

- for fixture in panels up to 6 mm thick
- fixed by: slotted nut M12 x 0.75 and spring washer
- hole Ø 12.2+0.1 mm
- flat tab can be bent up to 90° once
- punched part
- fixture using special tools MWZ 8 and MWZ 15
- fastening nut (slotted nut) M12 x 0.75

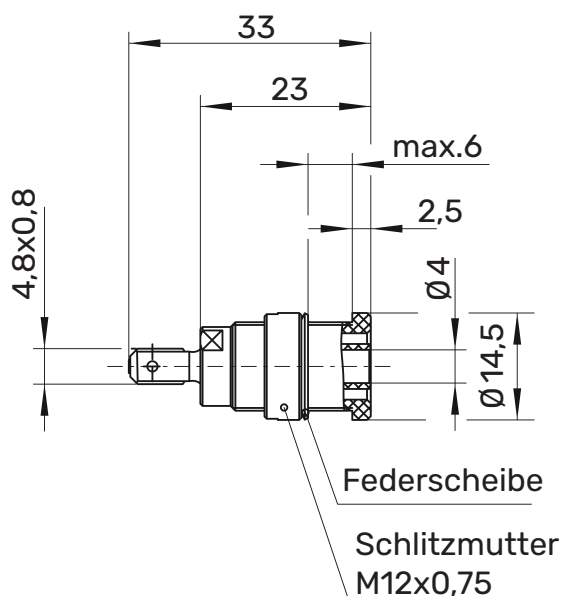

! WH 034



MA 007



General information

Order No. ¹⁾	SEB 7077 Ni ...(colour)
colour	black, red, blue, yellow, green, grey, brown, white, orange, purple, green-yellow
contact parts	nickel-plated
insulation	PA 6.6 (Polyamid) UL94 - V2

Technical data

terminal	FSH 4,8 mm x 0,8 mm
transition resistance	5 mΩ (Ni)
rated voltage ²⁾	1000 V CAT III
rated current ²⁾	24 A
operating temperature	from -25 °C to +80 °C
max. torque	45 Ncm
fastening nut	

¹⁾ other contact platings, colours and terminals on request

²⁾ at normal ambient temperatures

SEB 7077

Ni

	SW	Schwarz	Black	99014166
	RT	Rot	Red	99015956
	BL	Blau	Blue	990159570
	GE	Gelb	Yellow	99015958
	GN	Grün	Green	99015959
	GR	Grau	Grey	99017108
	BR	Braun	Brown	99018670
	WS	Weiß	White	99016838
	VI	Violett	Purple	99022815
	OR	Orange	Orange	99021153
	GNGE	Grüngelb	green-yellow	99016178