



KU 9909 L



Kupplung

Ø 4 mm

30 V_{AC} / 60 V_{DC}

32 A

- with solder terminal for cables up to 2.5 mm²
- with sleeve, unassembled

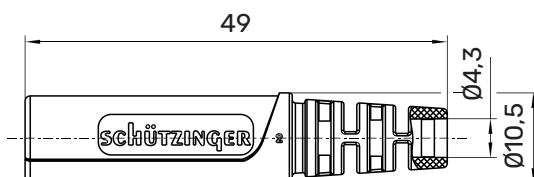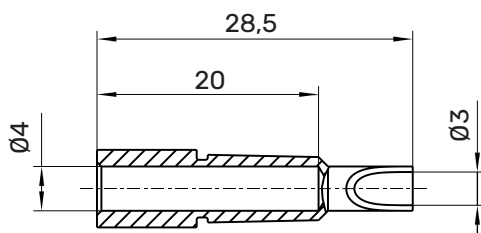

General information

Order No. ¹⁾	KU 9909 L Ni Au / ..(colour)
colour	black, red, blue, yellow, green
contact parts	nickel-plated gold-plated
sleeve	PA 6.6 (Polyamid) UL94 – V2

Technical data

terminal	solder up to 2,5 mm ²
sleeve for cable	Ø 4 mm
transition resistance ⁴⁾	3 mΩ (Ni) 2 mΩ (Au)
rated voltage ²⁾	30 V _{AC} / 60 V _{DC}
rated current ²⁾	32 A
operating temperature	from -25 °C to +80 °C

¹⁾ ther contact platings and colours on request
²⁾ at normal ambient temperatures
⁴⁾ depending on contact plating

KU 9909 L

Ni

Au

●	SW	Schwarz	Black	99025596	99025601
●	RT	Rot	Red	99025597	99025602
●	BL	Blau	Blue	99025598	99025603
●	GE	Gelb	Yellow	99025599	99025604
●	GN	Grün	Green	99025600	99025605