



PL 9696


test lead

Ø 4mm

30 V_{AC} / 60 V_{DC}

5 A

- with 0,5 mm² PVC lead
- with thin tip for measuring in hard-to-reach places

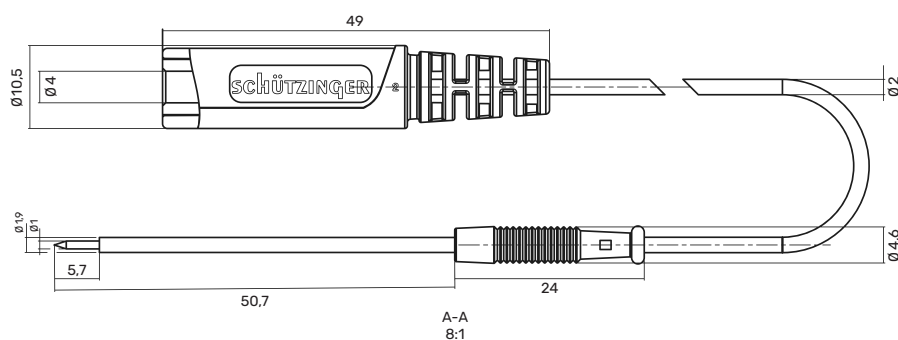

General Information

Order No. ¹⁾	PL 9696 Ni / .. (length) / ..(colour)
colours	black, red, blue
contact parts	brass nickle-plated
contact tip	stainless steel

Technical data

cable	PVC 0,5 mm ²
terminal	coupler Ø4 mm
rated voltage ²⁾	30 V _{AC} / 60 V _{DC}
rated current ²⁾	5 A
operating temperature	from -25 °C to +80 °C

¹⁾ other contact platings on request
²⁾ at normal ambient temperatures

PL 9696

Ni

● SW Schwarz Black

● RT Rot Red

● BL Blau Blue

99025637