

PRUEF 9632

Test probe




Ø 2 mm

30 V_{AC} / 60 V_{DC}

5 A

- For self-assembly
- With flexible tip for measuring in inaccessible places

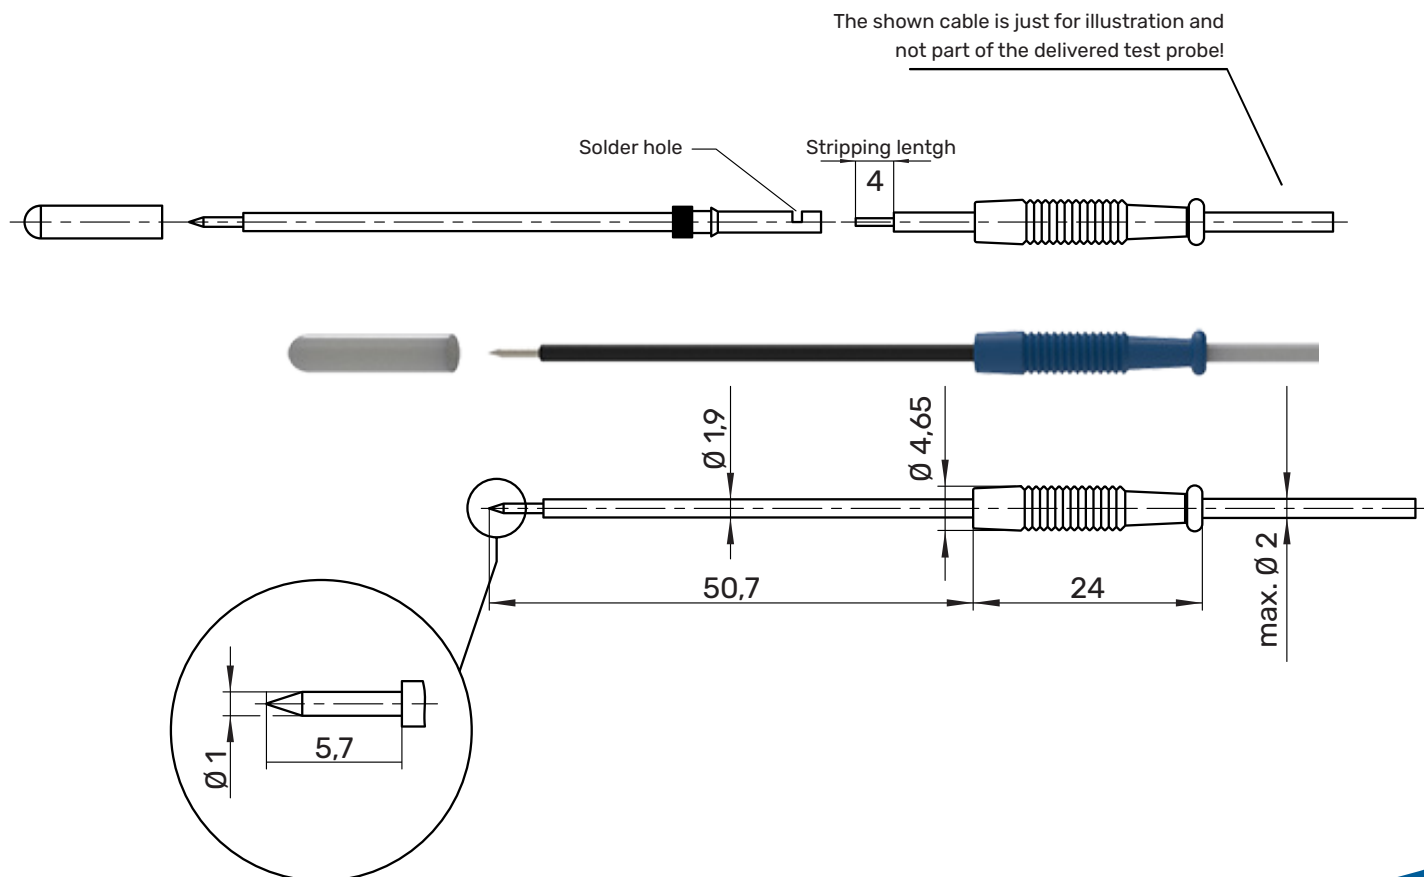

General Information

Order No.¹⁾ **PRUEF 9632 Ni / ..(Colour)**

Colours black, red blue, yellow, green, grey, brown, white, violet

Contact parts Tip: Stainless steel
Solder point: Brass nickel-plated

Technical information

Terminal	Solder
Transition resistance	20 mΩ
Rated voltage ²⁾	30 V _{AC} / 60 V _{DC}
Rated current ²⁾	5 A
Operating temperature	from -25 °C to +80 °C

¹⁾ other contact platings on request
²⁾ at normal ambient temperatures

PRUEF 9632

Ni

	SW	Schwarz	Black
---	-----------	----------------	--------------

	RT	Rot	Red
---	-----------	------------	------------

	BL	Blau	Blue
---	-----------	-------------	-------------

	GE	Gelb	Yellow
---	-----------	-------------	---------------

	GN	Grün	Green
---	-----------	-------------	--------------

	GR	Grau	Grey
---	-----------	-------------	-------------

	BR	Braun	Brown
---	-----------	--------------	--------------

	WS	Weiß	White
---	-----------	-------------	--------------

	VI	Violett	Purple
---	-----------	----------------	---------------